




HORIZONTAL MOUNTING

E-1IB-05AJ-2HX2X

Rated Current	: 16 Amps
Rated Voltage	: 1 Φ , 250VAC
Mounting	: 19" Horizontal (2U) Rack Mounting
Form Factor	: 2U Horizontal
Input Connection	: Power cord 1.5 Sq.mm. 3 core 3 meter with moulded 3 pin 16A Indian plug
Outlet Socket	: 13A UK socket (5 Nos.)
Colour	: Ral 9005 Texture
Operating Temperature	: 0 - 60°C

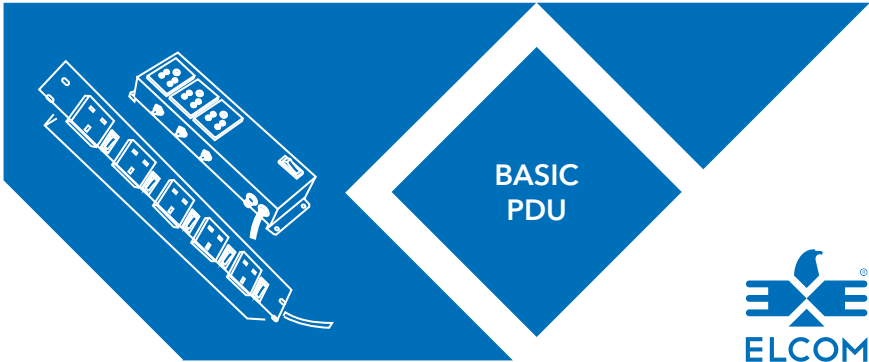

E-1ND-04AK-XHX3X

Rated Current	: 63 Amps
Rated Voltage	: 1 Φ , 250VAC
Mounting	: 19" Horizontal (2U) Rack Mounting
Form Factor	: 2U Horizontal
Input Connection	: Power cord 10 Sq.mm. 3 core 1.5 meter unterminated
Outlet Socket	: Nema L6-20R 20A (4 Nos.)
Colour	: Ral 9005 Texture
Operating Temperature	: 0- 60°C



E-1RA-06AM-1HC1Xg

Rated Current	: 16A
Rated Voltage	: 1 Φ , 250VAC
Mounting	: 19" Horizontal (2U) Rack Mounting
Form Factor	: 2U Horizontal
Input Connection	: Power cord 0.5 Sq.mm. 3 core 1.8 meter with moulded 3 pin 6A Indian plug
Outlet Socket	: 6A Indian socket (6 Nos.)
Colour	: Ral 9005 Texture
Operating Temperature	: 0 - 60°C



E-1IC-20AA-XHA3XW

Rated Current	: 32 Amps
Rated Voltage	: 1 Φ , 250VAC
Mounting	: 19" Horizontal (2U) Rack Mounting
Form Factor	: 2U Horizontal
Input Connection	: Power cord 6.0 Sq.mm. 3 core 3.0 meter unterminated
Outlet Socket	: IEC-320 C13 (16 Nos.)&IEC-320 C19 (4 Nos.)
Colour	: Ral 9005 Texture
Operating Temperature	: 0 - 60°C





E-1II-06AE-XHJ3X

Rated Current	: 80 Amps
Rated Voltage	: 1 Φ , 250VAC
Mounting	: 19" Horizontal (2U with 3U) Rack Mounting
Form Factor	: Connector Horizontal
Input Connection	: Connector
Outlet Socket	: IEC-320 C19 (6 nos.)
Colour	: Ral 9005 Texture
Operating Temperature	: 0 - 60°C



WALL MOUNTING PDU

E-1RA-01AD-1HC1F

Rated Current	: 5 Amps
Rated Voltage	: 1 Φ , 250VAC
Mounting	: Wall Mounting
Input Connection	: Power cord 0.5 Sq.mm. 3 core 2.0 meter with moulded 3 pin 6A Indian plug
Outlet Socket	: 6A Indian socket (1 No.)
Colour	: Steel gray
Operating Temperature	: 0 - 60°C
Feature	: Fuse, EMI/RFI filter, surge suppressor



WALL MOUNTING

E-1RA-02AB-1HC1L

(with line status indication)

Rated Current	: 5 Amps
Rated Voltage	: 1 Φ , 250VAC
Mounting	: Wall Mounting
Input Connection	: Power cord 0.5 Sq.mm. 3 core 2.0 meter with moulded 3 pin 6A Indian plug
Outlet Socket	: 6A Indian socket (2 Nos.)
Colour	: Steel gray
Operating Temperature	: 0 - 60°C
Feature	: Line status indication, Fuse, EMI/RFI filter, surge suppressor



E-1RA-03AA-1HH1F

Rated Current	: 5 Amps
Rated Voltage	: 1 Φ , 250VAC
Mounting	: Wall Mounting
Input Connection	: Power cord 0.5 Sq.mm. 3 core 2.0 meter with moulded 3 pin 6A Indian plug
Outlet Socket	: 6A Indian socket (3 Nos.)
Colour	: Steel gray
Operating Temperature	: 0 - 60°C
Feature	: Fuse, EMI/RFI filter, surge suppressor (Dedicated RCB per outlet)





BASIC PDU

E-1RA-03AB-1HC1F

Rated Current	: 5 Amps
Rated Voltage	: 1 Φ , 250VAC
Mounting	: Wall Mounting
Input Connection	: Power cord 0.5 Sq.mm. 3 core 2.0 meter with moulded 3 pin 6A Indian plug
Outlet Socket	: 6A universal socket (3 Nos.)
Colour	: Steel gray
Operating Temperature	: 0 - 60°C
Feature	: Fuse, EMI/RFI filter, surge suppressor



E-1RA-04AA-1HB1F

Rated Current	: 5 Amps
Rated Voltage	: 1 Φ , 250VAC
Mounting	: Wall Mounting
Input Connection	: Power cord 0.5 Sq.mm. 3 core 2.0 meter with moulded 3 pin 6A Indian plug
Outlet Socket	: 6A Indian socket (4 Nos.)
Colour	: Steel gray
Operating Temperature	: 0 - 60°C
Feature	: Fuse, EMI/RFI filter, surge suppressor, (Dedicated switch and RCB per outlet)



E-1RA-04AA-1HCEL (with line status indication)

Rated Current	: 5 Amps
Voltage	: 1 Φ , 250VAC
Mounting	: Wall Mounting
Input Connection	: Power cord 0.5 Sq.mm. 3 core 1.5 meter with moulded 3 pin 6A Indian plug
Outlet Socket	: 6A Indian socket (4 Nos.)
Colour	: Steel gray
Operating Temperature	: 0 - 60°C
Feature	: Line status indication, Fuse, EMI/RFI filter, surge suppressor



HORIZONTAL MOUNTING

E-1RA-06AC-1HC1X

Rated Current	: 5 Amps
Rated Voltage	: 1 Φ , 250VAC
Mounting	: 19" Horizontal front mounting
Input Connection	: Power cord 0.5 Sq.mm. 3 core 1.8 meter with moulded 3 pin 6A Indian plug
Outlet Socket	: 6A Indian socket (6 Nos.)
Colour	: Ral 9005 Texture
Operating Temperature	: 0 - 60°C



WALL MOUNTING

E-1RB-06AC-2HC1F

Rated Current	: 15 Amps
Rated Voltage	: 1 Φ , 250VAC
Mounting	: Wall Mounting
Input Connection	: Power cord 1.5 Sq.mm. 3 core 1.5 meter with moulded 3 pin 16A Indian plug
Outlet Socket	: 6A Indian socket (6 Nos.)
Colour	: Steel gray
Operating Temperature	: 0 - 60°C
Feature	: Fuse, EMI/RFI filter, surge suppressor



**E-1RF-01AA-2VA3F**

Rated Current	: 15 Amps
Rated Voltage	: 1 Φ , 250VAC
Mounting	: Wall Mounting
Input Connection	: Power cord 1.5 Sq.mm. 3 core 1.5 meter with moulded 3 pin 16A Indian plug
Outlet Socket	: 10/20A white socket (1 No.)
Colour	: Steel gray
Operating Temperature	: 0 – 60°C
Feature	: MCB, EMI/RFI filter, surge suppressor

**E-1RF-06AC-2HC1F**

Rated Current	: 15 Amps
Rated Voltage	: 1 Φ , 250VAC
Mounting	: Wall Mounting
Input Connection	: Power cord 1.5 Sq.mm. 3 core 1.5 meter with moulded 3 pin 16A Indian plug
Outlet Socket	: 6A Indian socket (6 Nos.)
Colour	: Steel gray
Operating Temperature	: 0 – 60°C
Feature	: Fuse, EMI/RFI filter, surge suppressor

**HORIZONTAL MOUNTING****E-1RF-06AC-2HC2F**

Rated Current	: 15 Amps
Rated Voltage	: 1 Φ , 250VAC
Mounting	: 19" Horizontal rear mounting
Input Connection	: power cord 1 sq.mm. 3core 3 meter with moulded 3 pin 16A Indian plug
Outlet Socket	: 6A Indian socket (6 Nos.)
Colour	: Steel gray
Operating Temperature	: 0 – 60°C
Feature	: Fuse, EMI/RFI filter, surge suppressor, (Dedicated switch per outlet),

**VERTICAL MOUNTING****E-1IB-10AA-2VA3X3**

Rated Current	: 16 Amps
Rated Voltage	: 1 Φ , 250VAC
Mounting	: Vertical (0U) Rack Mounting
Input Connection	: Power cord 2.5 Sq.mm. 3 core 2.5 meter with rewirable 3 pin 16A Indian plug
Outlet Socket	: IEC-320 C13 (10 Nos.)
Colour	: Ral 9005 Texture)
Operating Temperature	: 0 – 60°C





E-1IB-12AF-AVX1X

Rated Current : 16 Amps
Rated Voltage : 1Φ, 250VAC
Mounting : Vertical (0U) Rack Mounting
Input Connection : Power cord 1.5 Sq.mm. 3 core 4.0
meter with rewirable IEC 320 C20 plug
Outlet Socket : IEC-320 C13 (12 Nos.)
Colour : Ral 7035 Structure
Operating Temperature : 0 - 60°C



E-1IC-16AA-GVA3X

Rated Current : 32 Amps
Rated Voltage : 1Φ, 250VAC
Mounting : Vertical (0U) Rack Mounting
Input Connection : Power cord 6.0 Sq.mm. 3 core 3.5
meter with rewirable
Nema 30A ENP-LD6-30 plug
Outlet Socket : IEC-320 C13 (12 Nos.)&IEC-320 C19 (4 Nos.)
Colour : Ral 9005 Texture
Operating Temperature : 0 - 60°C



E-1IC-20AJ-5VD4XX

Rated Current : 32 Amps
Rated Voltage : 1Φ, 250VAC
Mounting : Vertical (0U) Rack Mounting
Input Connection : Power cord 4.0 Sq.mm. 3 core 3.0
meter with rewirable IEC60309
32A 3 Pin Industrial plug
Outlet Socket : IEC-320 C13 (12 Nos.)&IEC-320 C19
(8 Nos.)
Colour : Ral 9005 Texture
Operating Temperature : 0 - 60°C
Feature : Dedicated Fuse & Power on indicator
per outlet.



E-1SC-12AC-5VX3X

Rated Current : 32 Amps
Rated Voltage : 1Φ, 250VAC
Mounting : Vertical (0U) Rack Mounting
Input Connection : Power cord 6.0 Sq.mm. 3 core 2.0
meter with IEC 60309 Industrial plug
Outlet Socket : 16A Schuko socket (12 nos)
Colour : Ral 9005 Texture
Operating Temperature : 0 - 60°C
General Tolerance : +/- 2.0 mm





DIN-RAIL MOUNTING

E-1RA-01AD-XRX1XX

Rated Current	: 6 Amps
Rated Voltage	: 1 Φ , 250VAC
Mounting	: Din-rail Mounting
Input Connection	: Power cord 0.5 Sq.mm. 3 core 1.0 meter unterminated
Outlet Socket	: 6A Indian socket (1 no.)
Colour	: Ral 9005 Texture
Operating Temperature	: 0 - 60°C
General Tolerance	: +/- 2.0 mm



WALL MOUNTING

**E-1RF-04AA-2HC1F**

Rated Current	: 15 Amps
Rated Voltage	: 1 Φ , 250VAC
Mounting	: Wall Mounting
Input Connection	: Power cord 1 Sq.mm. 3 core 1.5 meter with moulded 3 pin 16A Indian plug
Outlet Socket	: 6A Indian socket (4 Nos.)
Colour	: Steel gray
Operating Temperature	: 0 - 60°C
Feature	: Fuse, EMI/RFI filter, surge suppressor

HORIZONTAL MOUNTING

E-1IB-12AF-AHF4X

Rated Current	: 16 Amps
Rated Voltage	: 1 Φ , 250VAC
Mounting	: 19" Horizontal (1U) Rack Mounting
Form Factor	: 1U Horizontal
Input Connection	: EMI C20 inlet (EMI-18)
Outlet Socket	: C13 outlet (12 Nos)
Colour	: Ral 9005 Texture
Operating Temperature	: 0 - 60°C
Feature	: Fuse, indicator per outlet

