




AGGREGATE METERING

EAM-S642A-DE336VX

Rated Current : 32 Amps
 Rated Voltage : 1 Φ , 230VAC
 Mounting : Vertical (0U) Rack Mounting
 Outlet Socket : IEC-60320 C13 (36 Nos.)
 & IEC-60320 C19 (06 Nos.)
 Operating Temp. : 0-45°C (Extended up to 65°C)
 Display : LCD
 Marking : CE, cULus
 Approvals : cULus

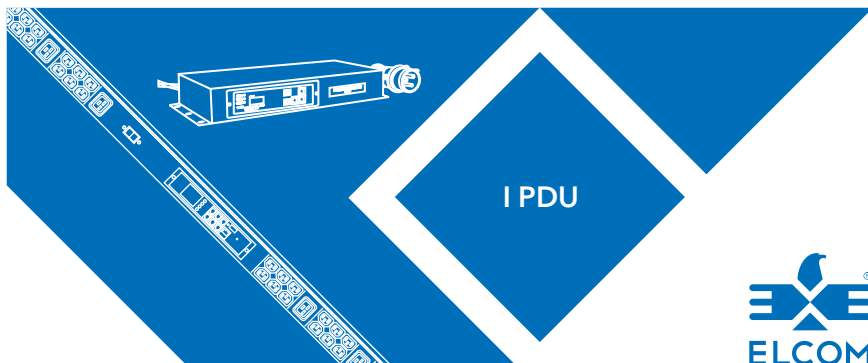

AGGREGATE METERING INDIVIDUAL SWITCHING

EAS-S624D-DE310VX

Rated Current : 32 Amps
 Rated Voltage : 1 Φ , 230VAC
 Mounting : Vertical (0U) Rack Mounting
 Outlet Socket : IEC-60320 C13 (21 Nos.)
 & IEC-60320 C19 (03 Nos.)
 Operating Temp. : 0-45°C (Extended up to 65°C)
 Display : LCD



INDIVIDUAL METERING

EIM-T624D-EE336VX

Rated Current : 32 Amps
 Rated Voltage : 3 Φ , 440VAC
 Mounting : Vertical (0U) Rack Mounting
 Outlet Socket : IEC-60320 C13 (21 Nos.)
 & IEC-60320 C19 (03 Nos.)
 Operating Temp. : 0-45°C (Extended up to 65°C)
 Display : LCD
 Marking : CE, cULus
 Approvals : cULus





I PDU

INDIVIDUAL METERING INDIVIDUAL SWITCHING

EIS-T630A-EE336VX

Rated Current : 32 Amps
Rated Voltage : 3 Φ , 440V AC
Mounting : Vertical (0U) Rack Mounting
Outlet Socket : IEC-60320 C13 (24 Nos.)
& IEC-60320 C19 (06 Nos.)
Operating Temp. : 0-45°C (Extended up to 65°C)
Display : LCD
Marking : CE, cULus
Approvals : cULus



POWER MEASUREMENT DEVICE

ED-PT672-XE3X

Rated Current : 32 Amps
Rated Voltage : 3 Φ , 440V AC
Mounting : Horizontal (1U) Rack Mounting
Outlet Socket : 72 Channels
Operating Temperature : 0-45°C (Extended up to 65°C)
Display : LED



ENVIRONMENT MONITORING DEVICE

EMD-TH1W1S1D1-BS

Rated Current : 16 Amps
Rated Voltage : 1 Φ , 230VAC
Mounting : Horizontal (1U) Rack Mounting
Number of Sensors : Digital Sensor Ports - 08 Nos
Analog sensor Ports - 04 Nos
Operating Temperature : 0-45°C (Extended up to 65°C)
Display : LCD



SINGLE INLINE METER

EIN-T6A3-2AK-2AJH

Rated Current : 132 Amps
Rated Voltage : 3 Φ , 440V AC
Mounting : Horizontal (1U) Rack Mounting
Outputs : 01 Nos(3 Φ , 32Amps, IEC 60309
(3P+N+E) Ind. Socket, 440VAC)
Operating Temperature : 0-45°C (Extended up to 65°C)
Display : LED





ELGO PDU



PLUG-N-PLAY SOCKET & PDU FOR EVERY DATA CENTER

AGGREGATE METERING

EAM-Series

Input Current	:16 Amps;32 Amps;63 Amps
Input Voltage	:1Φ, 230VAC; 3Φ, 415VAC
Frequency	:50Hz/60 Hz
Mounting	:Horizontal (1U) , Vertical(0U) Rack Mounting
Input Connection	:16,32,63 Amps Industrial Plug
Outlet Type	:Elgo IEC Outlets(C13;C19;C15;C21)
Outlet Combinations	:As per Requirement
Max.Outlet Combinations	:48 Outlets
Operating Temperature range	:0 - 60°C
Display	:LCD Display /LED Display
Marking	:CE
Approvals	:UL 62368



INDIVIDUAL METERING INDIVIDUAL SWITCHING

IMIS-Series

Input Current	16 Amps;32 Amps
Input Voltage	:1Φ, 230VAC; 3Φ, 415VAC
Frequency	:50Hz/60 Hz
Mounting	:Horizontal (1U) , Vertical(0U) Rack Mounting
Input Connection	16 Amps;32 Amps Industrial Plug
Outlet Type	:Elgo IEC Outlets(C13;C19;C15;C21)
Outlet Combinations	:As per Requirement
Max.Outlet Combinations	:30 Outlets
Operating Temperature range	:0 - 60°C
Display	:LCD Display /LED Display
Marking	:CE
Approvals	:UL 62368

